


HIRE FLEET

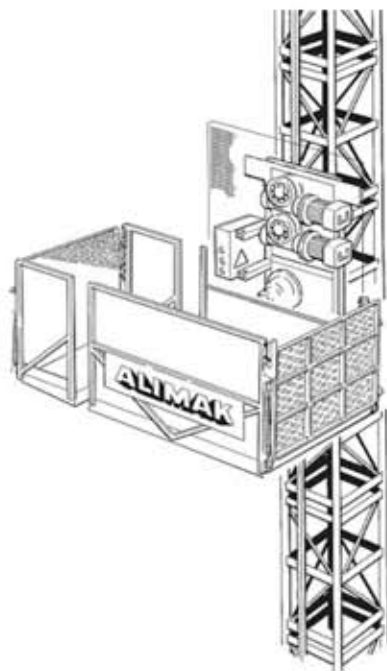

ALIMAK SCANDO M COMBI

A HEAVY DUTY MACHINE FOR LOADS BETWEEN 1,000 AND 2,500 KG

General Specification

The M Combi transports building materials such as dry lining, plasterboard and brick pallets in the manufacturers shrink wrap packaging direct to the workplace, clean and undamaged. The maximum standard platform size is 1.4 x 4.0m but can be extended to 1.4 x 6.2m. Robust loading ramps can be placed on three sides of the platform.

Mast, tie-ins and other accessories are interchangeable with the Scando passenger/materials hoist range.

Payload capacity	1,000 – 2,500kg
Speed	26m/min.
Max. lifting height	100m (Increased lifting height on request.)
Car width (internal)	1.4m
Car length (internal)	2.0 – 4.0 – 6.2m
Car height (internal)	N/A
Motor control	DOL
No. of motors	2
Safety device type	GF/GFD
Power supply range	380 – 480 V, 50Hz, 3 phase
Type of mast	A-50, Tubular steel with integrated rack
Length mast section	1.508m
Weight mast section with 1 rack	118 kg
Rack module	8